

McKAT[®]

BEAM CLAMP



DESCRIPTION

- ▶ Lightweight portable design.
- ▶ Jaw opening adjusts for wide range of tapered or flat-flanged beams.
- ▶ Provide shackle suspender for oversized hooks.
- ▶ Beam Clamp is individually tested and inspected with proof load.

Standard: BS EN 13157: 2004
Material: Forged Alloy Steel
FOS: 4:1
Heat Treatment: Quenched & tempered
Proof Load: 1.5 WLL


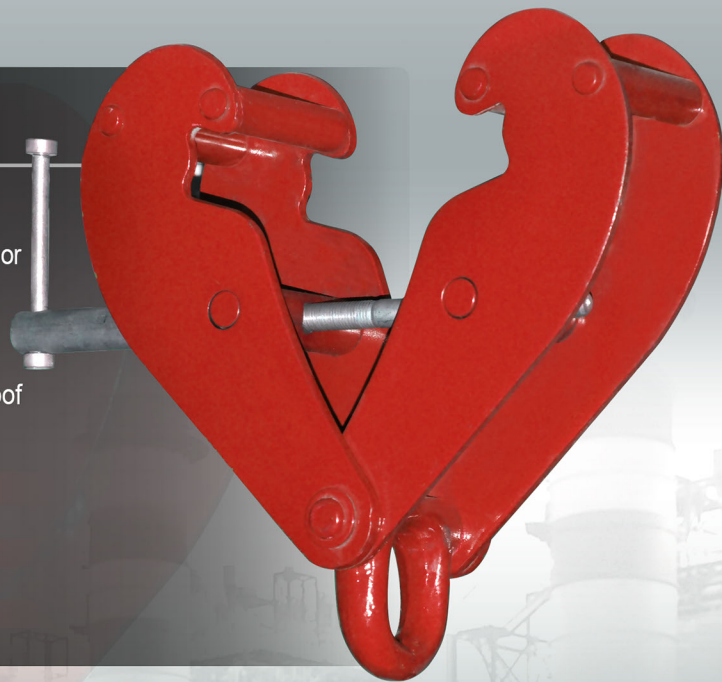


DIAGRAM:

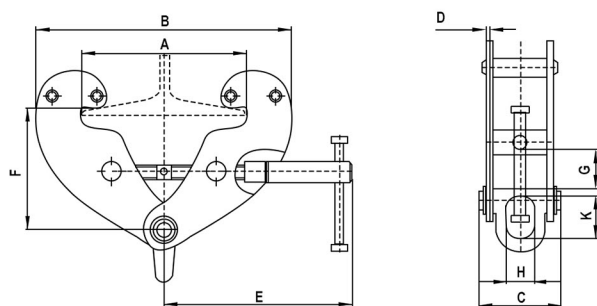

MCKAT BEAM CLAMP SPECIFICATION:

MODEL NO.	Rated Capacity (T)	Adjustable Beam Width (mm)	Dimensions (mm)											NET WT. (kg)
			A	B		C	D	E	F		G	H	K	
			Max.	Min.	Max.				Min.	Max.				
MBC-1000	1	75-230	240	192	367	94	4	218	103	155	20	30	45	4.2
MBC-2000	2	75-230	240	192	367	102	6	218	103	155	20	30	45	5.1
MBC-3000	3	80-320	330	243	491	132	8	258	157	223	47	45	63	10.4
MBC-5000	5	80-320	330	243	491	142	10	258	157	223	47	45	47	12.2
MBC-10000	10	90-320	330	259	501	180	12	293	175	235	56	64	95	18.8