

McKAT[®]

CONNECTING LINK



DESCRIPTION

- Use for connecting alloy steel chain to different components.
- Designed to use with grade 80 alloy steel chain.
- All connecting links are individually inspected and tested with proof load.
- Embossed forged marking for WLL, SIZE, CE and McKAT
- Spares are available for coupling pin and double - sleeve set.

Standard: BS EN 1677

Material: Alloy Steel

FOS: 4:1

Heat Treatment: Quenched & tempered

Proof Load: At 200 % of WLL

Colour Code: Red





DIAGRAM:

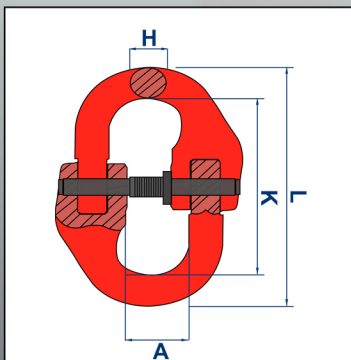

MCKAT CONNECTING LINK SPECIFICATION:

ARTICLE NO.	WLL (T)	H (mm)	A (mm)	K (mm)	L (mm)	NET WT. (kg)
MN-08	2	8.5	18	60.5	79.5	0.16
MN-10	3.15	10.8	25	68	93	0.3
MN-13	5.3	15	29	87	117	0.7
MN-16	8	19.8	34.5	108.4	148	1.1
MN-18	10	21	38	112	154	1.8
MN-20	12.5	24	41	121.5	169.5	1.9
MN-22	15	26	48	141.5	193.5	3.2
MN-26	21.2	30	57.5	158	220	4.5
MN-32	31.5	37	67	205	281	9