

McKAT

EYE - SELF LOCK HOOK



DESCRIPTION

- Designed to use for lifting slings.
- All eye - self lock hook are individually inspected and tested with proof load.
- Enhance safety with positive lock latch.
- Embossed forged marking for WLL, SIZE, CE and McKAT
- Spares are available for positive lock trigger kit.

Standard: BS EN 1677
Material: Alloy Steel
FOS: 4:1
Heat Treatment: Quenched & tempered
Proof Load: At 200 % of WLL
Colour Code: Red





DIAGRAM:

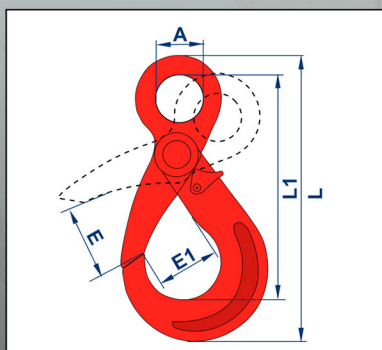

MCKAT EYE - SELF LOCK HOOK SPECIFICATION:

ARTICLE NO.	WLL (T)	A (mm)	E (mm)	E1 (mm)	L1 (mm)	L (mm)	NET WT. (kg)
MHES-08	2	25	40	35.8	136	175	0.88
MHES-10	3.15	34.5	50	45	168	214	1.58
MHES-13	5.3	40	60	52.5	207	268	3.0
MHES-16	8	50	65	63.3	254	332	5.9
MHES-20	12.5	64.5	80	86	274.5	332	7.0
MHES-22	15	70	83	76	319	415	12.3
MHES-26	21.2	80	106	96	362	472	20
MHES-32	31.5	105	140	133	470	614	44