

# McKAT<sup>®</sup>

## MASTER LINK ASSEMBLY



### DESCRIPTION

- Use for 3 or more legs wire rope and chain sling.
- All master link assembly are individually inspected and tested with proof load.
- Embossed forged marking for WLL, CE and McKAT


**Standard:** BS EN 1677  
**Material:** Alloy Steel  
**FOS:** 4:1  
**Construction:** Quenched & tempered  
**Proof Load:** At 200 % of WLL  
**Colour Code:** Red



McKAT originality

Forged Marking

### DIAGRAM:

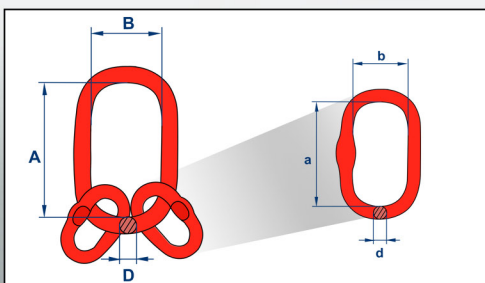

### MCKAT MASTER LINK ASSEMBLY SPECIFICATION:

| ARTICLE NO.                              | WLL (T) | A (mm) | B (mm) | D (mm) | a (mm) | b (mm) | d(mm) | NET WT. (kg) |
|------------------------------------------|---------|--------|--------|--------|--------|--------|-------|--------------|
| MASTER LINK ASSEMBLY FOR CHAIN SLING     |         |        |        |        |        |        |       |              |
| MA-04                                    | 4.25    | 160    | 95     | 22     | 70     | 46     | 16    | 2.25         |
| MA-06                                    | 6.7     | 200    | 120    | 30     | 90     | 60     | 19    | 4.75         |
| MA-11.2                                  | 11.2    | 240    | 140    | 34     | 140    | 65     | 25    | 8.7          |
| MA-14                                    | 14.5    | 200    | 110    | 28     | 140    | 70     | 22    | 5.5          |
| MA-17                                    | 17      | 250    | 150    | 40     | 180    | 100    | 32    | 9.9          |
| MA-23                                    | 23      | 270    | 140    | 36     | 185    | 90     | 28    | 11.9         |
| MA-26                                    | 26.5    | 300    | 180    | 45     | 180    | 100    | 34    | 20.6         |
| MA-31                                    | 31.5    | 380    | 200    | 50     | 200    | 100    | 40    | 30.5         |
| MA-45                                    | 45      | 400    | 200    | 55     | 200    | 110    | 45    | 39           |
| MA-67                                    | 67      | 430    | 220    | 60     | 300    | 180    | 50    | 67.5         |
| MASTER LINK ASSEMBLY FOR WIRE ROPE SLING |         |        |        |        |        |        |       |              |
| MA-05                                    | 5.8     | 170    | 90     | 20     | 120    | 70     | 16    | 2.4          |
| MA-07                                    | 7.6     | 170    | 90     | 22     | 150    | 80     | 20    | 3.8          |
| MA-08                                    | 8.5     | 160    | 90     | 22     | 140    | 70     | 20    | 3.6          |
| MA-10                                    | 10      | 190    | 100    | 25     | 150    | 80     | 20    | 4.5          |
| MA-11.8                                  | 11.8    | 270    | 140    | 28     | 140    | 70     | 20    | 5.9          |
| MA-12                                    | 12.7    | 210    | 110    | 28     | 170    | 90     | 22    | 6.1          |
| MA-15                                    | 15.2    | 270    | 140    | 32     | 190    | 100    | 25    | 9.5          |
| MA-17.1                                  | 17.1    | 270    | 140    | 32     | 190    | 100    | 26    | 9.7          |
| MA-22                                    | 22.3    | 270    | 150    | 38     | 230    | 130    | 30    | 15.3         |
| MA-28                                    | 28.1    | 280    | 155    | 40     | 200    | 110    | 32    | 16.4         |
| MA-33                                    | 33.5    | 340    | 180    | 45     | 230    | 130    | 32    | 21.8         |
| MA-35                                    | 35      | 320    | 170    | 45     | 225    | 125    | 36    | 23.5         |
| MA-40                                    | 40      | 380    | 200    | 50     | 270    | 140    | 38    | 33.2         |
| MA-58                                    | 58      | 430    | 220    | 60     | 380    | 200    | 50    | 66           |
| MA-60                                    | 60      | 410    | 250    | 60     | 350    | 195    | 50    | 63.9         |