

McKAT[®]

MASTER LINK



DESCRIPTION

- Use for 1 or 2 legs wire rope and chain sling.
- All master link are individually inspected and tested with proof load.
- Embossed forged marking for WLL, CE and McKAT


Standard: BS EN 1667
Material: Alloy Steel
FOS: 4:1
Proof Load: At 200 % of WLL
Colour Code: Red



Forged Marking

Technical standards conformity

DIAGRAM:

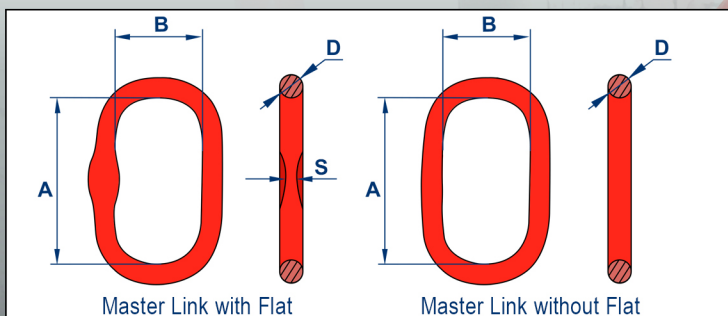

MCKAT MASTER LINK SPECIFICATION:

ARTICLE NO.	WLL (T)	A (mm)	B (mm)	D (mm)	S (mm)	NET WT. (kg)
MM-03	3.8	120	70	16	9	0.6
MM-05	5.8	170	90	20	11	1.25
MM-06	6.4	300	210	25	~	3.53
MM-10	10	190	100	25	13	2.25
MM-105	10.5	270	140	28	15	3.85
MM-11	11	300	210	32	~	5.94
MM-12	12.7	210	110	28	15	2.95
MM-15	15.2	270	140	32	17	4.9
MM-19	19	270	140	38	~	7.2
MM-21	21.2	300	180	45	~	11.7
MM-31	31.5	380	200	50	~	18.5
MM-45	45	400	200	55	~	23.5
MM-56	56	430	220	60	~	28.7
MM-70	70	450	250	70	~	42.4