

McKAT[®] CHAIN SLING



DESCRIPTION

- Slings available with capacities from 2T – 45T
- McKAT chain sling can be custom made according to the requirements with the third party inspection.
- Our In-House Service center can repair & recertify all your chain slings.

Standard: BS EN 818 - 4

FOS: 4:1

Proof Load: At 200 % of WLL



Four leg Lifting

Two leg Lifting

HOW TO ORDER

- **Chain size** Chain Diameter
- **Legs** Number of Legs
- **WLL** Working Load Limit (Ton)
- **EWL** Effective Working Length (meters)
- **Master Link or special** Master Link/ Master Link Assembly
- **End Termination** Grab Hook/ Sling Hook/ Self Lock Hook/ Shackle etc.
- **Lifting Angle** Angle from leg to vertical

MCKAT CHAIN SLING SPECIFICATION:

Chain size	Single Leg	Two Leg Angle from leg to vertical		Three/Four Leg Angle from leg to vertical	
		0 to 45	45 to 60	0 to 45	45 to 60
8 mm	2.00	2.80	2.00	4.25	3.00
10 mm	3.15	4.25	3.15	6.70	4.75
13 mm	5.30	7.50	5.30	11.20	8.00
16 mm	8.00	11.20	8.00	17.00	11.80
18 mm	10.00	14.10	10.00	21.00	15.00
20 mm	12.50	17.50	12.50	26.50	19.00
22 mm	15.00	21.20	15.00	31.50	22.40
26 mm	21.20	30.00	21.20	45.00	31.50

Working Load Limit in Tonnes

McKAT[®] CHAIN SLING



DESCRIPTION

- Slings available with capacities from 2T – 45T
- McKAT chain sling can be custom made according to the requirements with the third party inspection.
- Our In-House Service center can repair & recertify all your chain slings.

Standard: BS EN 818 - 4


FOS: 4:1

Proof Load: At 200 % of WLL

Four leg Lifting



Two leg Lifting

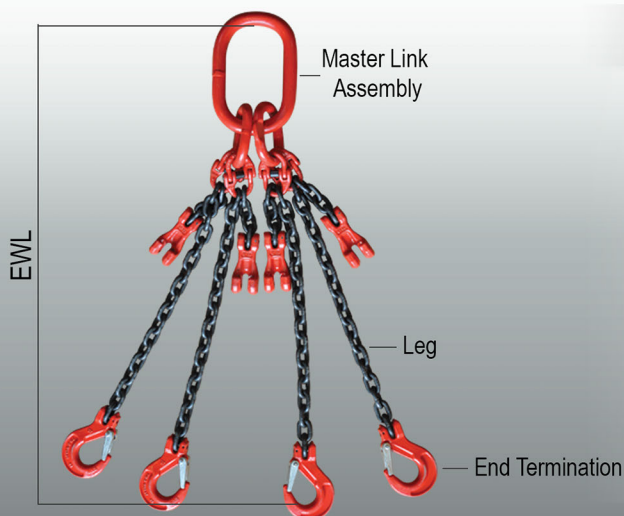

HOW TO ORDER

- **Chain size** Chain Diameter
- **Legs** Number of Legs
- **WLL** Working Load Limit (Ton)
- **EWL** Effective Working Length (meters)
- **Master Link or special** Master Link/ Master Link Assembly
- **End Termination** Grab Hook/ Sling Hook/ Self Lock Hook/ Shackle etc.
- **Lifting Angle** Angle from leg to vertical

MCKAT CHAIN SLING SPECIFICATION:

Chain size	Single Leg	Two Leg Angle from leg to vertical		Three/Four Leg Angle from leg to vertical	
		0 to 45	45 to 60	0 to 45	45 to 60
8 mm	2.00	2.80	2.00	4.25	3.00
10 mm	3.15	4.25	3.15	6.70	4.75
13 mm	5.30	7.50	5.30	11.20	8.00
16 mm	8.00	11.20	8.00	17.00	11.80
18 mm	10.00	14.10	10.00	21.00	15.00
20 mm	12.50	17.50	12.50	26.50	19.00
22 mm	15.00	21.20	15.00	31.50	22.40
26 mm	21.20	30.00	21.20	45.00	31.50

Working Load Limit in Tonnes