

McKAT[®]

GRAB HOOK



DESCRIPTION

- Use for shortening or holding required length of chain.
- For use with Grade 80 alloy steel chain.
- All grab hook are individually inspected and tested with proof load.
- Embossed forged marking for WLL, SIZE, CE and McKAT
- Spares are available for load pin.

Standard:	BS EN 1677
Material:	Alloy Steel
FOS:	4:1
Heat Treatment:	Quenched & tempered
Proof Load:	At 200 % of WLL
Colour Code:	Red





DIAGRAM:

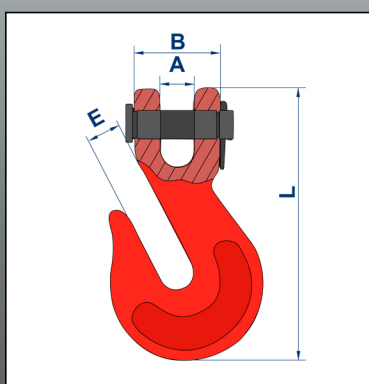

MCKAT GRAB HOOK SPECIFICATION:

ARTICLE NO.	WLL (T)	A (mm)	B (mm)	E (mm)	L (mm)	NET WT. (kg)
MHG-08	2	10	30.5	11.2	93	0.62
MHG-10	3.15	13	35	12.7	114.5	1.00
MHG-13	5.3	19	47	17	144	2.22
MHG-16	7.2	23	56	20	177	4.41