

# McKAT<sup>®</sup>

## CONTAINER LUGS



### DESCRIPTION

- Used for lifting containers.
- All container lugs are individually inspected with proof load
- Embossed forged marking for WLL, SIZE, CE, and McKAT

|                        |                          |
|------------------------|--------------------------|
| <b>Standard:</b>       | BS EN 1677               |
| <b>Material:</b>       | Forged Super Alloy Steel |
| <b>FOS:</b>            | 4:1                      |
| <b>Heat Treatment:</b> | Quenched & tempered      |
| <b>Proof Load:</b>     | At 200 % of WLL          |
| <b>Colour Code:</b>    | Red                      |




Forged WLL Marking




Technical Standards Conformity


#### DIAGRAM: STRAIGHT TYPE

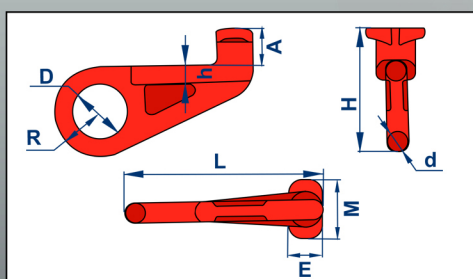

#### DIAGRAM: LEFT TYPE

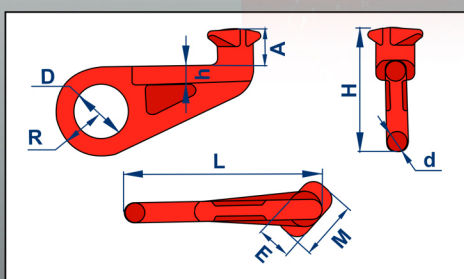

#### DIAGRAM: RIGHT TYPE

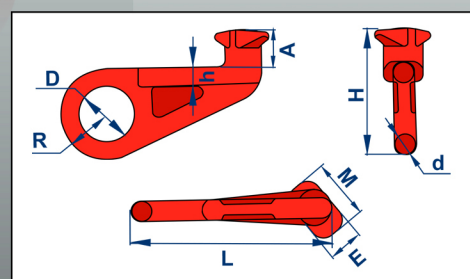

#### MCKAT CONTAINER LUGS STRAIGHT TYPE SPECIFICATION:

| ARTICLE NO. | WLL (T) | A (mm) | D (mm) | d (mm) | E (mm) | H (mm) | h (mm) | L (mm) | M (mm) | R (mm) | NET WT. (kg) |
|-------------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------|
| MHLS        | 12.5    | 46     | 70     | 25     | 48     | 166    | 25     | 265    | 75     | 60     | 4            |

#### MCKAT CONTAINER LUGS LEFT TYPE SPECIFICATION:

| ARTICLE NO. | WLL (T) | A (mm) | D (mm) | d (mm) | E (mm) | H (mm) | h (mm) | L (mm) | M (mm) | R (mm) | NET WT. (kg) |
|-------------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------|
| MHLL        | 12.5    | 46     | 70     | 25     | 48     | 166    | 25     | 265    | 75     | 60     | 4            |

#### MCKAT CONTAINER LUGS RIGHT TYPE SPECIFICATION:

| ARTICLE NO. | WLL (T) | A (mm) | D (mm) | d (mm) | E (mm) | H (mm) | h (mm) | L (mm) | M (mm) | R (mm) | NET WT. (kg) |
|-------------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------|
| MHLR        | 12.5    | 46     | 70     | 25     | 48     | 166    | 25     | 265    | 75     | 60     | 4            |