


# McKAT<sup>®</sup>

## PLAIN TROLLEY




### DESCRIPTION

- Rugged steel side plates formed to include bumpers and trolley guards.
- Equipped with specially designed contoured wheels that fit both tapered and flat-flanged beams.
- Maintenance-free, sealed precision ball bearings that offer smooth movement, with low friction and long life.
- High strength and rigidity with lightweight and compact design.
- Easily adjust trolley to fit a wide variety of beam flange width.
- To be used with hook suspended hoist.

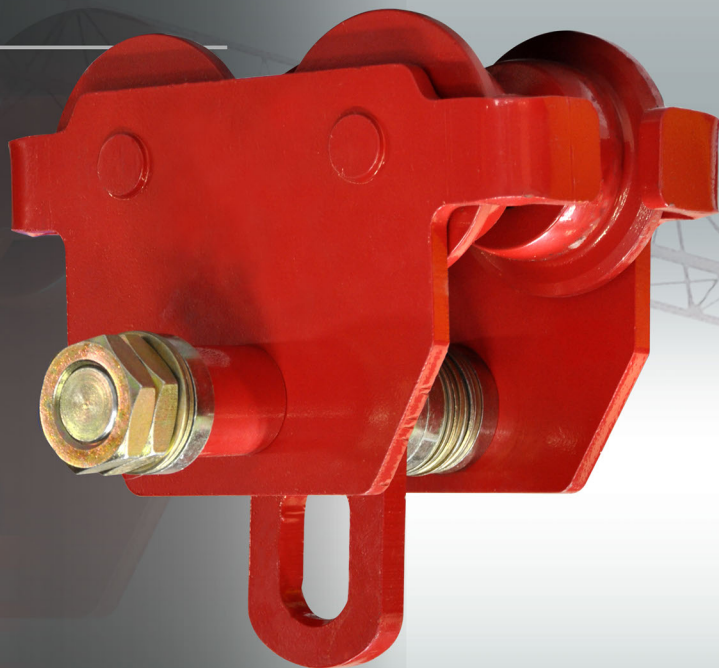

**Standard:** BS EN 13157: 2004  
**Material:** Forged Alloy Steel  
**FOS:** 4:1  
**Heat Treatment:** Quenched & tempered  
**Proof Load:** 1.5 WLL

### DIAGRAM:

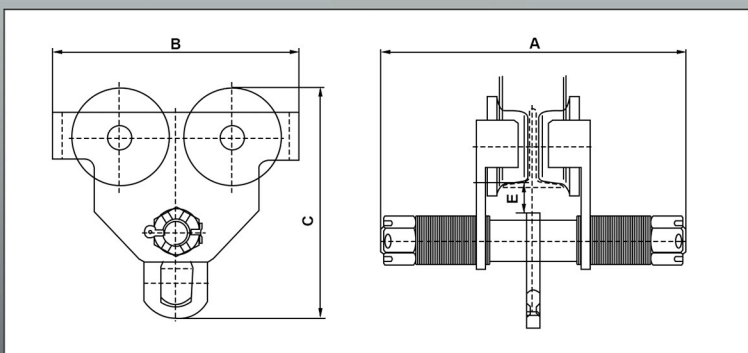

### MCKAT PLAIN TROLLEY SPECIFICATION:

MODEL NO.	Rated Capacity	Min. Radius of Curve (m)	Dimensions (mm)				Adjustable Beam Width (mm)	NET WT. ( kg )
			A	B	C	E	M	
MPT-500	0.5	0.9	264	216	195	31	64-152	8.6
MPT-1000	1	1	335	260	239	32.5	64-203	15.4
MPT-2000	2	1.1	353	300	286	31	88-203	23
MPT-3000	3	1.3	371	325	336	35	102-203	40
MPT-5000	5	1.4	393	390	393	37	114-203	50
MPT-10000	10	1.7	436	470	500	45	125-203	97